

# The front tank **Solitaire F**

 **LEMKEN** THE AGROVISION COMPANY



## TO THE POINT

- Metering: Four metering units for up to four width sections
- Tank: pressure-resistant single or double tank with steel lid
- Double tank: Allows sowing using the single shot or double shot method


## SPECIFICATIONS

Designation	F/2400	
Tank volume [l]	2,400	2,400
Tank version	Single tank	Double tank
Metering units	4	4
Empty weight [kg]	780	780
Total weight incl. tyre packer + additional weight [kg]	1,900	1,900
Length [cm]	170	170
Transport width [cm]	245	245
Filling height [cm]	160	160
Filling opening [cm]	220 x 80	140 x 80 / 80 x 80

Front-rear combinations are becoming increasingly popular for sowing. The Solitair F front tank can be combined with different sowing methods, such as single seed drilling or coulter bars at the rear, maximising the number of days in the field. Thanks to its **balanced weight distribution** it can be used with smaller tractors with a lower lifting capacity. This not only reduces operating costs, but also makes the machine combination very agile.

## Delivery rates are decisive

The Solitair F front tank is pressure-resistant and therefore able to handle even **high application rates**. The 2,400 litre double tank can be used for both single shot and double shot sowing.

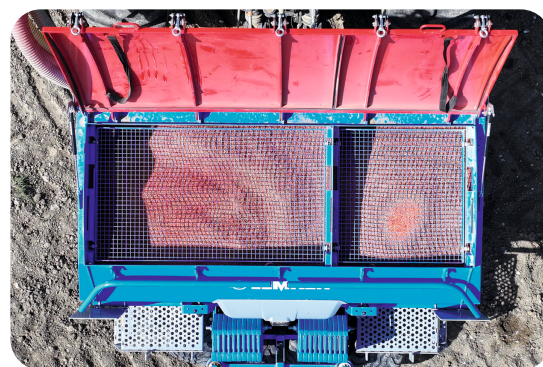

## Highly precise metering

The Solitair F has four modular metering units. As a result, it is suitable for both **single shot and double shot sowing**. Seed is guided to the rear either to the right of the tractor or optionally underneath the tractor.

If the Solitair F is used as a single tank, a combination with four width sections is also possible, for example with a precision seed drill or an OptiDisc coulter bar with 6 m working width.



## Maximum utilisation

**Optimum soil contact** is one of the basic prerequisites for high crop yields. To achieve this, the Solitair F features a front mounting space, where a tyre packer or an external weight of up to 800 kg can be mounted. This creates an optimal weight distribution and therefore ensures **safety** and a comfortable ride.

The steerable trailed tyre packer can optionally be mounted on the tractor as a front tyre packer. It can also be ballasted with suitcase weights of up to 500 kg.



**LEMKEN GmbH & Co. KG**  
Weseler Strasse 5  
46519 Alpen, Germany  
Tel. +49 2802 81-0  
Fax +49 2802 81-220  
info@lemken.com  
www.lemken.com

**Your specialist LEMKEN dealer:**